

Installation Instructions

Cabin Filter

Instrucciones de montaje

Filtro de habitaculo

Notice de montage

Filtre d'habitacle

C35774C


LOCATION: UNDER THE GLOVE COMPARTMENT*





QUANTITY USED: 2

DEGREE OF DIFFICULTY: DIFFICULT

ESTIMATED INSTALLATION TIME: 30 MINUTES

1. Remove bolts from trim panel below passenger side of instrument panel.
2. Pull trim panel rearward, then disconnect the floor lamp electrical connector.
3. Remove the trim panel.
4. Slide cabin air filter covers retaining tabs inward Figure 2.
5. Remove the cabin air filter covers Figure 3.
6. Remove the cabin air filters from the housing Figure 4.
7. Install the new cabin air filters.
8. Install the cabin air filters covers, then slide retaining tabs outward.
9. Connect the floor lamp electrical connector.
10. Install the trim panel below the passenger side of the instrument panel, then the bolts.

⚠ WARNING	
	<p>Turn The Engine Off</p> <p>Failure to do so may cause electrocution, burns and severe injury.</p>

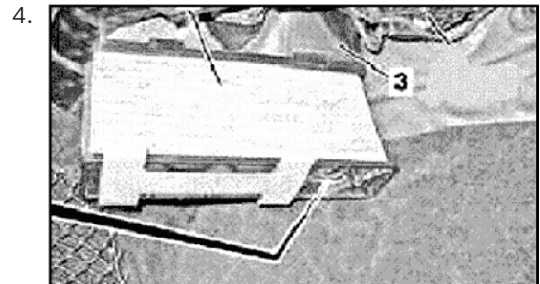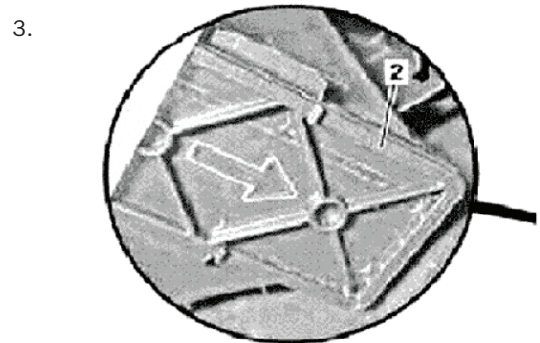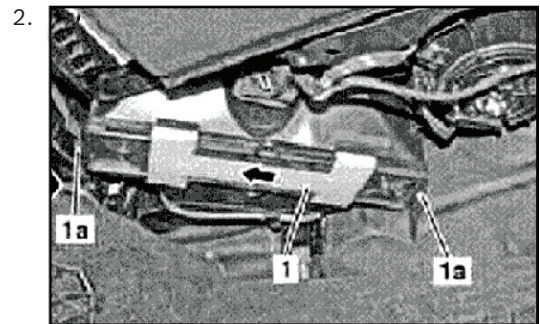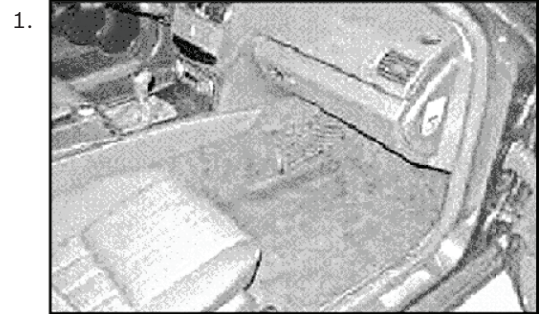

1. FILTER COVER
1a. CLAMP
2. FILTER ELEMENT

*Instructions may vary by make, model and year.