

**Installation Instructions**

Cabin Filter

**Instrucciones de montaje**

Filtro de habitaculo

**Notice de montage**

Filtre d'habitacle

**C15831**

**LOCATION: BEHIND THE GLOVE COMPARTMENT\***

**QUANTITY USED: 1**

**DEGREE OF DIFFICULTY: MODERATE**

**ESTIMATED INSTALLATION TIME: 24 MINUTES**

**2002-06 Coupe & 2005-08 Convertible  
The Mini is equipped with a service interval indicator.**


1. Remove the four cabin air filter cover retaining screws. The cabin air filter cover is located at the lower righthand side of the instrument panel below the storage bin, Figure 1.
2. Disengage the cabin air filter cover retainers, then remove the cover, Figure 2.
3. Pull the cabin air filter downward to remove.
4. Install the new cabin air filter element into the filter housing, Figure 3. Ensure the filter element is properly located in the guides.
5. Install the cabin air filter cover. Ensure the retainers are engaged, then install the four retaining screws.

**2007-09 Coupe & 2009 Convertible  
The is equipped with a service interval indicator.**

1. Remove the two cabin air filter cover retaining screws. The cabin air filter cover is located at the lower righthand side of the instrument panel below the storage bin, Figure 4.
2. Disengage the cabin air filter cover retainers, then remove the cover, Figure 5.
3. Pull the cabin air filter downward to remove.
4. Install the new cabin air filter element into the filter housing, Figure 6. Ensure the filter element is properly located in the guides.
5. Install the cabin air filter cover. Ensure the retainers are engaged, then install the two retaining screws.

**WARNING**

**Turn The Engine Off**  
Failure to do so may cause electrocution, burns and severe injury.

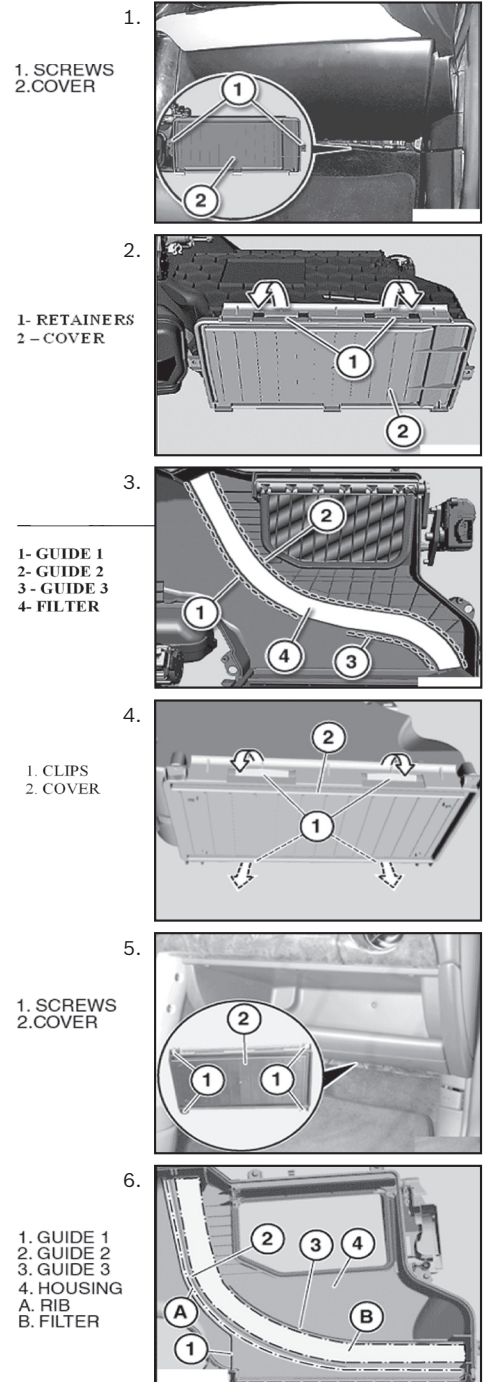

\*Instructions may vary by make, model and year.